


Installation

MOUNTING HEIGHT

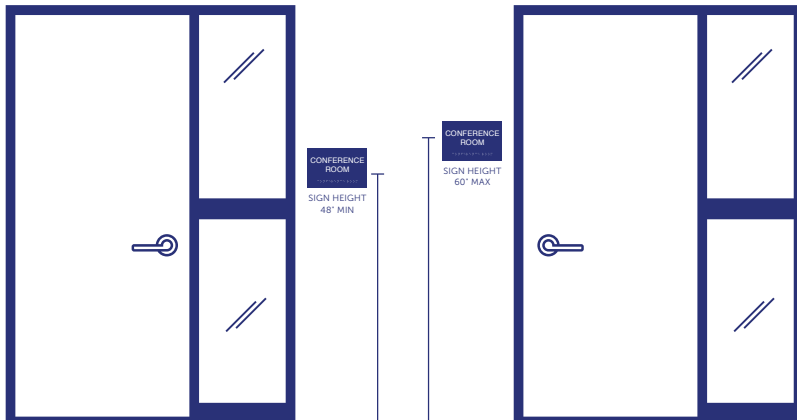


- + The baseline of the tactile copy can be mounted between 48" at the lowest point to 60" at the lowest point of the text. This allows signs of different sizes to be mounted on the same visual plane.
- + Elevator cars are excluded from this rule.

The ADA (American with Disabilities Act) helps remove barriers for people with disabilities. More than 2.5 million Americans suffer from a visual impairment—not just blindness. High contrast ADA compliant signs help ensure accessibility for seniors, the low vision and blind.

An ADA compliant sign is required for every permanent room or space in a public or commercial building. Always defer to your local building authority for regulations and code updates.

- + ada.gov
- + 2010 ADA SAD, Chapter 7
- + 2010 TAS ADA-ABA, Chapter 44


MOUNTING LOCATION




- + Single door: sign must be mounted next to door on latch side.




- + Inward swinging door: Sign may be mounted on door if three criteria are met:
 1. The door closes automatically.
 2. The sign is mounted on the push side of the door.
 3. The door does not have a hold-open device.Examples: kitchen doors, restroom doors, etc.

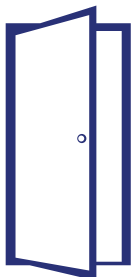

- + Outward swinging door: sign must be mounted to the wall outside of the arc of the door swing. Within an 18"x18" square of clear floor space. 18" away from the door and 18" away from the wall. See diagram.

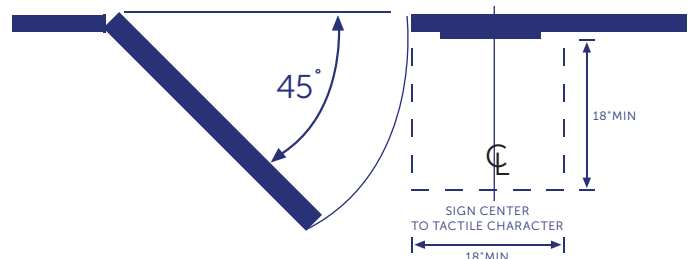

- + Double doors (one active leaf): Sign shall be placed on inactive leaf.



- + Double doors (two active leaves): Sign shall be placed to the right of the right handed door.